

Tex-Pure™

Rolled Depth Elements

PECO originally created the Tex-Pure product in the 1930's from simple, readily available cotton materials and introduced it to the oil & gas industry for compressor lube oil filtration. In the decades since it has become an industry icon known as the "sock filter". Today, Tex-Pure elements are available in a variety of materials providing flexibility, economy and reliable depth filtration for many industrial applications.



THE BOTTOM LINE

- The Choice is Yours**
 PECOFacet is an industry leader in fluid filtration products. Don't get locked into a single source. Adding PECOFacet to the supplier list for all your fluid filtration needs will ensure your access to the best products at competitive prices. Tex-Pure elements are made with quality materials in an ISO certified manufacturing environment. Performance and structural integrity are backed by a no-nonsense factory warranty. Send us the manufacturer model number and we'll do the rest.

APPLICATIONS

- General Industrial**
- Compressor Lube Oil
- Amine
- Glycol
- Produced Water
- Cooling Water
- Liquid Fuels
- Fluid Product and Process
- Heat Transfer Fluid

SPECIFICATIONS

MATERIALS SELECTION

MEDIA	MAX. TEMP. [F]	OUTER COVER	MAX. TEMP. [F]
Filter-Tex®	240	Cotton	350
White Cotton	350	Orlon	350
Cotton String	350	Polypropylene	180
Polypropylene	180	Glass	750
Unbonded Glass	750		

- CORE** steel (galvanized or tin plated)
- INTERNAL SPRING** steel

OPERATING DATA

- Recommended change-out D.P. is 20 psid
- Max D.P. 110 psid at ambient temperature¹
- Normal flow direction is outside to inside

PARTICLE RETENTION

- Efficiency:** 98%
- Grades:** 2, 5, 10, 20, 25, 40, 50, 75, 100

VESSELS

- PECO Series 55, 65, RFF, 56, 66 and RGG
- Others

REPLACEMENT OPTION FOR

- Commercial
- Filtration Systems, Inc.
- Hilco
- Jonell
- Nelson Winslow
- Nugent
- Others

NOTES

- Max. D.P. may be limited by the vessel manufacturer's design.
- Commercial and Winslow replacements also available. Consult our cross reference guide for more information.



A Name You Know...Filters You Can Trust™

perryequipment.com

NOMINAL DIMENSIONS


For Models CS, FMP, FT, FTS, GF, WC

Size	O.D. [in.]	I.D. [in.]	Length [in.]
318	3.0	1.56	18.625
322	3.0	1.56	22.625
330	3.0	1.56	30.625
336	3.0	1.56	36.625
422	4.0	1.56	22.625
436	4.0	1.56	36.625
718	7.0	2.67	18
722	7.0	2.67	22
730	7.0	2.67	30
736	7.0	2.67	36
757	6.125	2.67	18.5
836	8.0	2.125	36
822	8.0	2.125	22
830	8.0	2.125	30
1122	11.0	2.67	22
312	3.0	1.56	12.625
430	4.0	1.56	30.625
518	4.5	1.56	18.750
522	5.0	2.125	22
536	5.0	2.125	36
622	6.0	2.125	22
629	6.0	2.67	29
430	4.0	1.56	30.625
7518	6.75	2.67	18

For Models PCL, PW

Size	O.D. [in.]	I.D. [in.]	Length [in.]
PCL-2.5 x 16	2.62	1.28	16
PCL-2.5 x 19.5	2.50	1.28	19.5
PCL-2.5 x 20	2.50	1.28	20
PCL-2.5 x 29	2.50	1.28	29
PCL-2.5 x 29.25	2.50	1.28	29.25
PCL-2.5 x 30	2.50	1.28	30
PCL-2.875 x 20	2.875	1.28	20.5
PCL-2.875 x 27	2.875	1.28	27.5
PCL-2.875 x 29.25	2.875	1.28	29.25
PCL-2.875 x 30	2.875	1.28	30
PW-1541-T	3.75	1.56	15.375
PW-1542-T	3.75	1.56	15.75
PW-1542-2T	3.75	1.56	31.5
PW-1544-T	3.75	1.56	15.75
PW-1645-O-16	4.38	1.56	15.75
PW-1645-O-2-30	4.50	1.56	30
PW-1645-OE-2-30	4.25	1.56	30.75
PW-1645-2C-W-5	4.00	1.56	31.25
PW-1645-2C-W-10	4.00	1.56	31.25
PW-1656-O-16	4.75	1.56	16
PW-1656-O-45-C-2	4.375	1.56	31.75
PW-1656-O-E-2	4.375	1.56	31.75
PW-1873-T	6.50	2.67	19
PW-1874-T	6.50	2.67	17.125
PW-4016	4.00	1.56	16
PW-4030	4.00	1.56	31.750

ORDERING INFORMATION

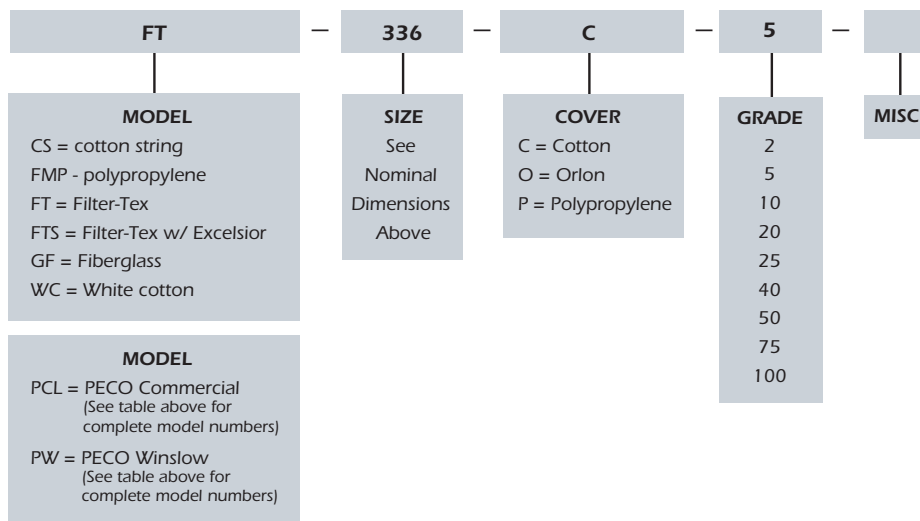

■ Not all combinations are available. Consult customer service for verification if necessary.



Wolters Industrial Park / P.O. Box 640 / Mineral Wells, TX 76068
 Phone 940.325.2575 / Fax 940.325.4622 / peryequipment.com
 Email PECOElements@PECOFacet.com

Brought to you by PECOFacet
 a CLARCOR company

© 2009 PECOFacet
 PECOFacet has a policy of continuous product research and development and reserves the right to change design and specifications without notice.
Terms and Conditions of Sale can be accessed at www.pecofacet.com