


## Type 2822/2823 Conductivity/Resistivity Electrode

2822 2823

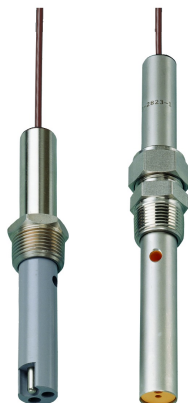


### Conductivity/Resistivity:

- Wetted Materials: 316 SST or Titanium
- Process Connection Choices: 3/4 inch threads for In-line or Submersion, 1.5 inch Sanitary Tri-clamp flange and 2 inch Sanitary Tri-clamp flange
- Cell constants and corresponding measuring ranges: 0.01 cm<sup>-1</sup> / 0.55 to 100 µS (18.3 mΩ to 10 KΩ) 0.1 cm<sup>-1</sup> / 1 to 1000 µS (1 mΩ to 1 KΩ) 1.0 cm<sup>-1</sup> / 10 to 10,000 µS (5 to 5,000 ppm) 10.0 cm<sup>-1</sup> / 100 to 200,000 µS (50 to 100,000 ppm) 20.0 cm<sup>-1</sup> / 200 to 400,000 µS (100 to 200,000 ppm)
- Compatible Instruments: Signet Instrument Types: 8850, 8860 8900, 9900 or the 9950 with the 2850 Sensor Electronics
- Additional Features: (2823) Thread is reversible for submersion mounting

Body	Process Connection	Process Connection Size	Cell Constant (cm <sup>-1</sup> )	Operating Range	MFR #
Stainless steel	Thread	3/4 inch	10	100 - 100000 µS/cm	3-2822-1
Stainless steel	Sanitary Tri-clamp flange	3/4 inch	20	200 - 400 000 µS/cm	3-2823-1

Electrode	Code
316 SST	198 844 002
316 SST	198 844 003

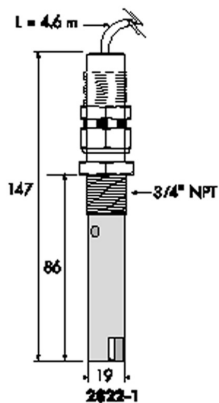

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>