
RFP Series

RotaFlo® Variable Area Flow Meter



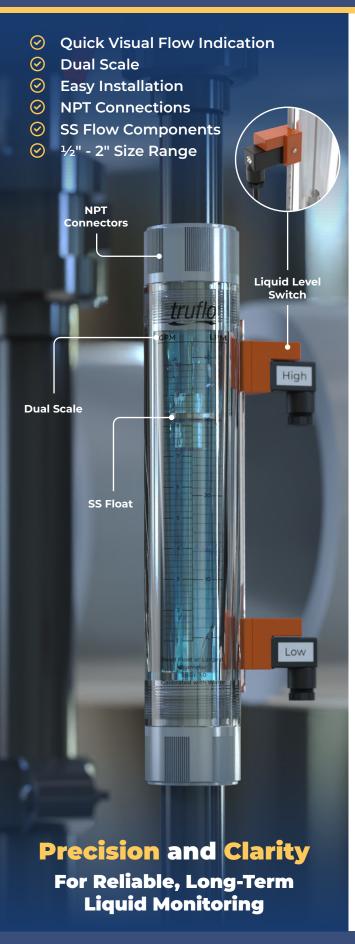

The RFP Rotaflo® Series flow meter provides exceptional accuracy and long term local indication of measured liquid media.

The Rotaflo® comprises a SS guide rod and a dual scale for clear visibility. The large tapered float provides stability and consistent flow indication throughout the entire range.

Technical Specifications

Plastic Wetted Material	Acrylic FPM PVC
Metal Wetted Material	SS
Accuracy	±4 F.S.
Scale	GPM LPM
Connection	NPT
Standards & Approvals	CE FCC RoHS Compliant

Technical Parameters

Model	Measure Range		End	Accuracy	Size (mm)		
Model	GPM	LPM	Connector	Accuracy	А	В	С
RFP-15011	0.1 ~ 1	0.4 ~ 4	½" FNPT	± 4 %	233	180	Ф32
RFP-15022	0.2 ~ 2	1 ~ 7					
RFP-15033	0.3 ~ 3	1 ~ 11					
RFP-15055	0.5 ~ 5	1.8 ~ 18					
RFP-20110	1 ~ 10	4 ~ 40	³ / ₄ " FNPT	±4%	283	236	Ф45
RFP-20220	2 ~ 20	10 ~ 70					
RFP-20535	5 ~ 35	20 ~ 140					
RFP-25110	1 ~ 10	4 ~ 40	1" FNPT	± 4 %	297	235	Ф51
RFP-25220	2 ~ 20	10 ~ 70					
RFP-25330	3 ~ 30	10 ~ 110					
RFP-25535	5 ~ 35	20 ~ 140					
RFP-25550	5 ~ 50	25 ~ 190					
RFP-40440	4 ~ 40	15 ~ 150	1½" FNPT	±4%	302	240	Ф65
RFP-40660	6 ~ 60	22 ~ 220					
RFP-4015100	15 ~ 100	50 ~ 400					
RFP-5020100	20 ~ 100	100 ~ 350	2" FNPT	±4%	367	294	Φ75
RFP-5040100	40 ~ 150	150 ~ 550					
RFP-5060200	60 ~ 200	150 ~ 750					

Dimensions

